




# ISO BEARING-SINGAPORE (PTE)LTD.

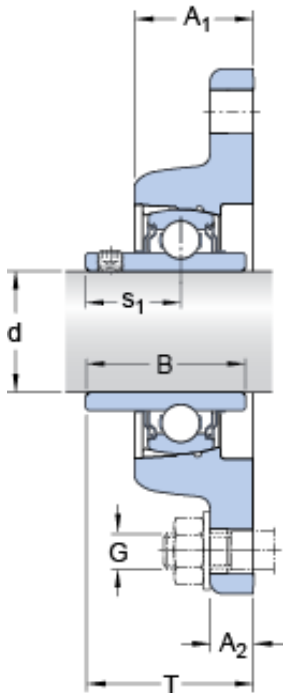

FYT 2. TF/VA201 Bearing 2D drawings and 3D CAD models

## SKF FYT 2. TF/VA201 bearing units

Bearing No. FYT 2. TF/VA201

|  |                     |
|--|---------------------|
| Size   | 47.63x50.8x20.64 mm |
| Bore Diameter                                  | 47,63 mm            |
| Outer Diameter                                 | 50,8 mm             |
| Width  | 20,64 mm            |
| d  | 50.8 mm             |
| A <sub>1</sub>                                 | 47.63 mm            |
| A <sub>2</sub>                                 | 20.64 mm            |
| J  | 184.15 mm           |
| H  | 215.9 mm            |
| L  | 127 mm              |
| T  | 69 mm               |
| H  | 19 mm               |
| B  | 55.6 mm             |
| s <sub>1</sub>                                 | 33.4 mm             |
| Basic dynamic load rating - C                  | 43.6 kN             |
| Basic static load rating - C <sub>0</sub>      | 29 kN               |
| Limiting speed                                 | 50 r/min            |
| Limiting temperature - T                       | 250 ° C             |
| Mass bearing unit                              | 3.45 kg             |
| Grub (set) screw - G <sub>2</sub> - 3/8-24 UNF | 3/824 UNF           |
| Hexagonal key size for grub screw - H          | 4.762 mm            |
| Recommended tightening torque for grub screw   | 16.5 N · m          |
| Category                                       | Bearings            |



## ISO BEARING-SINGAPORE (PTE)LTD.

|   |                       |
|---|-----------------------|
| Inventory                                   | 0.0                   |
| Manufacturer Name                           | SKF                   |
| Minimum Buy Quantity                        | N/A                   |
| Weight / Kilogram                           | 0                     |
| EAN   | 7316571767222         |
| Product Group                               | M06110                |
| A <sub>1</sub>                              | 47.63 mm              |
| A <sub>2</sub>                              | 20.64 mm              |
| N   | 19 mm                 |
| s <sub>1</sub>                              | 33.4 mm               |
| Basic dynamic load rating C                 | 43.6 kN               |
| Basic static load rating C <sub>0</sub>     | 29 kN                 |
| Limiting temperature T max.                 | 250 ° C               |
| Grub (set) screw G <sub>2</sub>             | 3/8-24 UNF            |
| Hexagonal key size for grub screw N         | 4.763 mm              |
| Attachment bolts, recommended metric size G | 16 mm                 |
| Bearing                                     | YAR 211-200-2FW/VA201 |